

sur FAÇADE

SKYBAIE®

O.S. Pneumatique

 **VERSION**

The advantages

INTEGRATED COPPER NETWORK

Accessible from the top two corners of the device*.

MAINTENANCE - OPTIMISED SYSTEM

Lock can be opened manually /mechanism parts easily interchangeable

INVISIBLE MECHANISM IN CLOSED POSITION

(double-acting cylinders and integrated lock)

HOLES IN THE FRONT FITTED WITH PLUGS IN THE SAME FINISH AS THE FRAME*

* Feeding position adaptable to site on request

The SKYBAIE Pneumatic Single Opening is a smoke extraction façade frame with a thermal break. This DENFC provides natural smoke extraction and air supply functions for all types of building (ERP, ERT, industrial buildings). Different installations are possible: surface-mounted installation, tunnel installation, renovation installation, installation integrated into a curtain wall, between frames, with a transom and/or a spandrel.



OPTIONS AND FINISHING

Options

- Standby or safety position switches (certified option)
- Possibility of two-tone colouring: please contact us
- Special glazing on request: burglar-proof, solar control, screen-printed, treated, acoustic, etc.

Finishing

- Painted in standard RAL colours
- Anodised in standard RAL colours
- Qualicoat / Qualimarine label

SIZE RANGE

Control

- Max: 1600 x 1600 mm and 2400 x 1200 mm
- Weight: 70 kg maximum (including opening panel)

TYPE AND OPENING ANGLE

- Opening type: external flap
- Opening angle: 60° max
- Maximum tilt: 5° from vertical

Trigger characteristics

- The manual release consists of one or two lock blocks (depending on the size of the chassis).
- Opening pressure is 8 bar and consumption is 0.85nl (normal litre) at 10 bar.
- In the case of a frame with two lock units, these are connected for simultaneous release.

Type of filling	Light transmission TL* (%)	Sun Factor g* (%)	Filling weight (Kg/m ²)	Heat transfer from filling Ug (W-m ² .K)	Acoustic attenuation of the filling R _w (C;C _{tr})*	Chassis sound attenuation R _w (C;C _{tr})
33.2 - 16 (Air) - 4	81	72	26	2.7	Rw = 35(-1;-5) dB RA,tr = 30 dB	Rw=36(-4;-8)
44.2 - 16 (Air) - 4	81	71	31	2.7	Rw = 37(-2;-6) dB RA,tr = 31 dB	Rw=36(-2;-6)
44.2 - 16 (Air) - 6	80	70	36	2.7	Rw = 37(-1;-3) dB RA,tr = 34 dB	Rw=36(-2;-6)
33.2 FE - 16 (Argon 90%) - 4	81	56	26	1.1	Rw = 35(-1;-5) dB RA,tr = 30 dB	Rw=36(-4;-8)
44.2 FE - 16 (Argon 90%) - 4	80	55	31	1.1	Rw = 37(-2;-6) dB RA,tr = 31 dB	Rw=36(-2;-6)
44.2 FE - 16 (Argon 90%) - 6	80	47	36	1.1	Rw = 37(-1;-3) dB RA,tr = 34 dB	Rw=36(-2;-6)
44.2 FE 1.0 - 16 (Argon 90%) - 6	75	36	36	1.0	Rw = 37(-1;-3) dB RA,tr = 34 dB	Rw=36(-2;-6)
44.2 CS 70/40 - 16 (Argon 90%) - 6	69	47	36	1.0	Rw = 37(-1;-3) dB RA,tr = 34 dB	Rw=36(-2;-6)
44.2 Ac. FE 1.0 - 20 (Argon 90%) - 66.2AC.	73	45	52	1.0	Rw = 49(-2;-8) dB RA,tr = 41 dB	Rw = 43(-1;-2) dB RA,tr = 41 dB
66.2 Ac. FE 1.0 - 16 (Argon 90%) - 66.2AC.	71	-	62	1.0	Rw = 51(-2;-6) dB RA,tr = 45 dB	Rw = 44(-1;-3) dB RA,tr = 41 dB
SKYDÔME panel	-	-	50	1.35	-	Rw = 41(0;-2) dB RA,tr = 39 dB
SKYDÔME panel + integrated heavy mass	-	-	50	1.35	-	Rw = 42(-1;-2) dB RA,tr = 40 dB

Open area (m2) and SUE (m2)

		Widht (mm)																	
		700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400
		free surface (m₂)																	
Height (mm)	700	0.28	0.33	0.39	0.44	0.49	0.55	0.60	0.65	0.70	0.76	0.81	0.86	0.92	0.96	1.00	1.05	1.10	1.15
	800	0.33	0.40	0.46	0.52	0.59	0.65	0.71	0.77	0.84	0.90	0.96	1.03	1.09	1.15	1.22	1.28	1.33	1.39
	900	0.39	0.46	0.53	0.61	0.68	0.75	0.82	0.90	0.97	1.04	1.12	1.19	1.26	1.34	1.41	1.48	1.55	1.63
	1000	0.44	0.52	0.61	0.69	0.77	0.85	0.94	1.02	1.10	1.19	1.27	1.35	1.44	1.52	1.60	1.68	1.77	1.85
	1100	0.49	0.59	0.68	0.77	0.86	0.96	1.05	1.14	1.24	1.33	1.42	1.52	1.61	1.70	1.79	1.89	1.98	2.07
	1200	0.55	0.65	0.75	0.85	0.96	1.06	1.16	1.27	1.37	1.47	1.58	1.68	1.78	1.88	1.99	2.09	2.19	2.30
	1300	0.60	0.71	0.82	0.94	1.05	1.16	1.28	1.39	1.50	1.62	1.73	1.84	1.95	2.07	2.18	2.29		
	1400	0.65	0.77	0.9	1.02	1.14	1.27	1.39	1.51	1.64	1.76	1.88	2.00	2.13					
	1500	0.70	0.84	0.97	1.10	1.24	1.37	1.50	1.64	1.77	1.90	2.03	2.17						
	1600	0.76	0.90	1.04	1.19	1.33	1.47	1.62	1.76	1.90	2.04								
		Aa (m₂)																	
Hauteur (mm)	700	0.20	0.23	0.25	0.28	0.30	0.33	0.35	0.38	0.40	0.42	0.45	0.47	0.50	0.52	0.54	0.57	0.59	0.62
	800	0.23	0.26	0.30	0.33	0.36	0.40	0.41	0.44	0.47	0.50	0.52	0.55	0.58	0.61	0.63	0.66	0.69	0.72
	900	0.25	0.3	0.34	0.38	0.41	0.45	0.48	0.51	0.54	0.57	0.60	0.63	0.66	0.70	0.73	0.76	0.79	0.82
	1000	0.28	0.33	0.38	0.42	0.47	0.51	0.55	0.58	0.62	0.65	0.69	0.72	0.75	0.79	0.82	0.86	0.89	0.92
	1100	0.30	0.36	0.42	0.47	0.52	0.56	0.61	0.66	0.70	0.73	0.77	0.81	0.85	0.88	0.92	0.96	0.99	1.03
	1200	0.32	0.38	0.45	0.51	0.56	0.62	0.67	0.72	0.77	0.82	0.86	0.90	0.94	0.98	1.02	1.06	1.10	1.14
	1300	0.35	0.42	0.48	0.55	0.61	0.67	0.73	0.79	0.84	0.89	0.93	0.97	1.01	1.07	1.11	1.14		
	1400	0.37	0.44	0.51	0.59	0.66	0.72	0.79	0.85	0.91	0.91	0.97	1.01	1.06	1.10	1.14			
	1500	0.40	0.47	0.54	0.61	0.70	0.78	0.84	0.91	0.98	1.04	1.09	1.14						
	1600	0.43	0.50	0.57	0.65	0.74	0.82	0.90	0.96	1.04	1.12								

PERFORMANCES AND CLASSIFICATION


Operation : type A (opening only)
Useful surface : Aa
Aeraulic coefficient : $0.5 \leq C_v \leq 0.88$
Heat resistance : B300
Reliability : Re 1000 + Le 10000
Static wind resistance : WL 1500
Low temperature : T (00)
AEV rating : A*2 - E*9A - V*C2

CERTIFICAT CE AND NF

- The SKYBAIE opening systems comply with CE standards in accordance with EN 12101-2-2003.
- CE certification no.: **0333-CPR-219085**
- For NF in accordance with standard NF S 61937-1 (December 2003) & NF S 61937-7 (October 2010)
- NF Certification N°: **07/09.09**
- Report on the suitability for use of natural air supply mechanisms in facades in accordance with NF S 61937-1 (December 2003) & NF S 61937-8 (July 2018)
- PV Reference : **EFR-22-005093**

Profile

Profile geometry

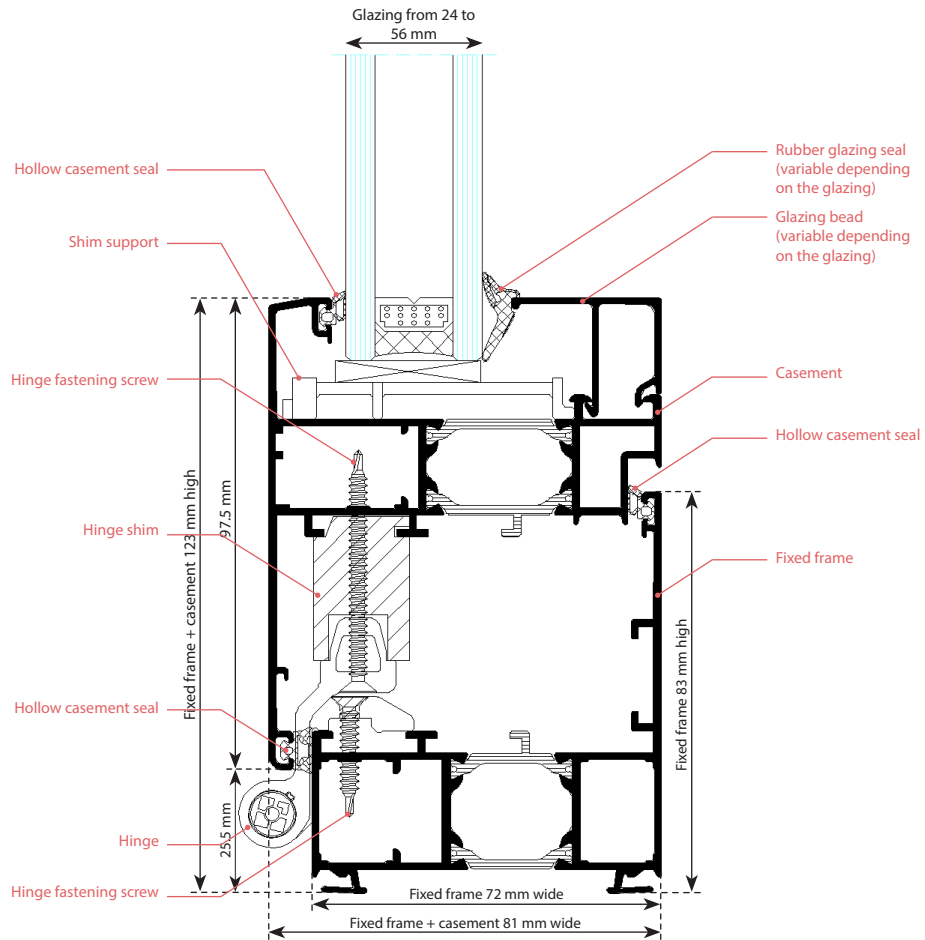

Technical details



Ejector



SKYDÔME

Entre Deux Villes
02270 Sons-et-Ronchères
T : 03 23 21 79 90
M : info@skydome.eu
www.skydome.eu

For the product range in other countries, please contact your local representative or visit www.skydome.eu.

SKYDÔME reserves the right to modify product specifications without notice. The information and technical details contained in this documentation are provided in good faith and apply to the uses described. The recommendations for use must be checked to ensure they are appropriate and comply with the actual requirements, the specifications and all applicable legislation and regulations.

For other applications and conditions of use, please contact our technical team. Their advice must be sought concerning uses of our products that are not described specifically herein.

Click this link to check that you are seeing the most up-to-date and accurate information about our products: